



Keypad

Disassembly process for the keypad.

Written By: Andrew



INTRODUCTION

This guide give instructions on how to locate the keypad for removal and/or repair.



TOOLS:

- [iFixit Opening Tools](#) (1)
 - [T6 Torx Screwdriver](#) (1)
-

Step 1 — Battery



- Flip over the phone and then slide down the back cover with your thumb.

Step 2



- Lever out the battery from the phone using your thumb.

Step 3 — Motherboard



- Use a plastic opening tool to pry out the two tabs on the top corners of the battery compartment.

Step 4





- Gently pull off hinge cap piece from the the top of the phone.

Step 5




- Using a T6 Torx Screwdriver, remove four 7.62mm screws around the corners of the battery compartment

Step 6

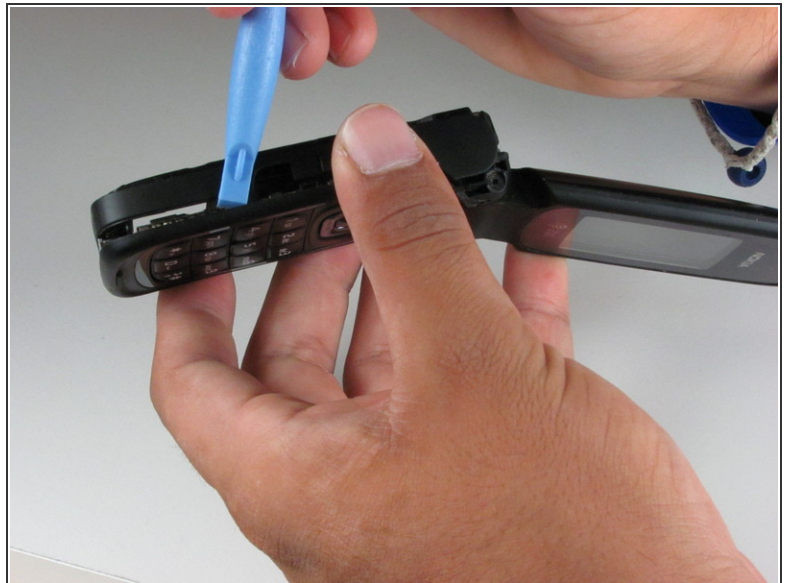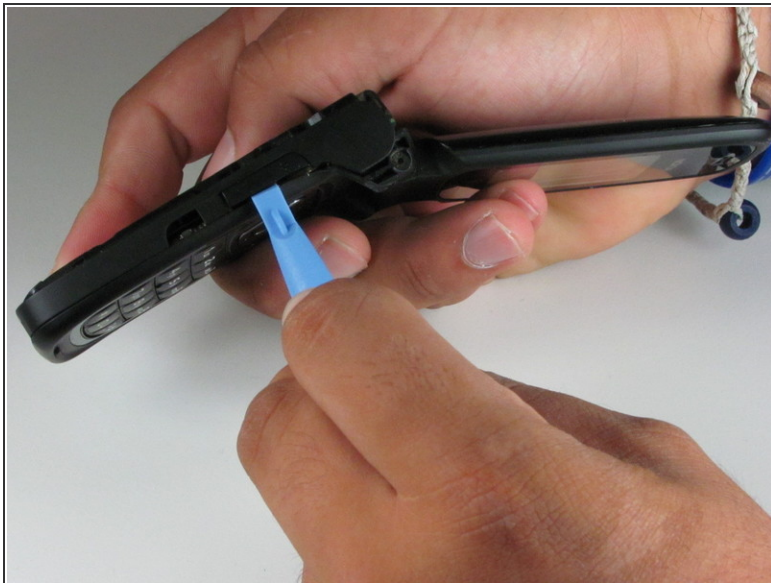


- Open the phone and turn it on its side
- Using a plastic opening tool, run along the seam located around the sides of the phone to pop the clips holding the casing to the frame

Step 7

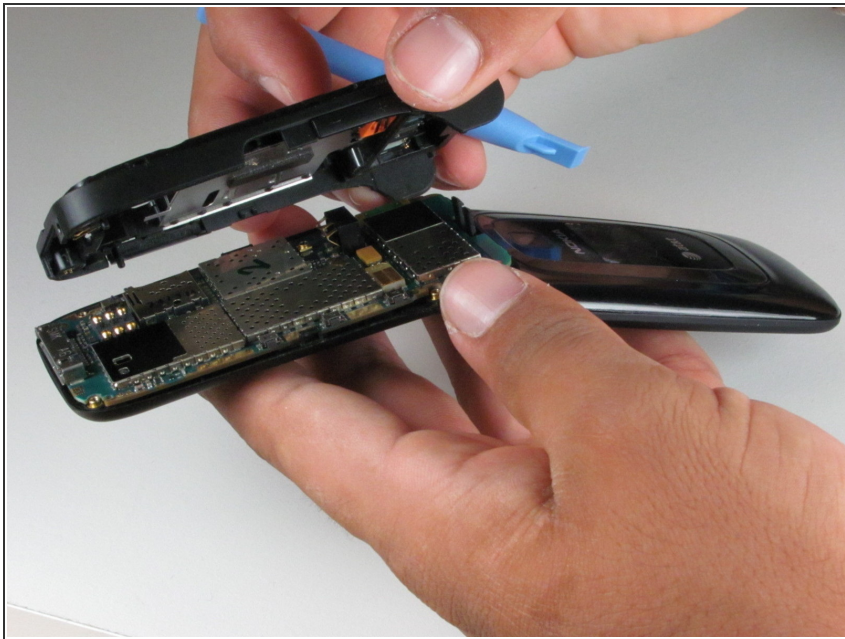


- Using your hand, gently pull of the back panel from the bottom half of the phone.

Step 8

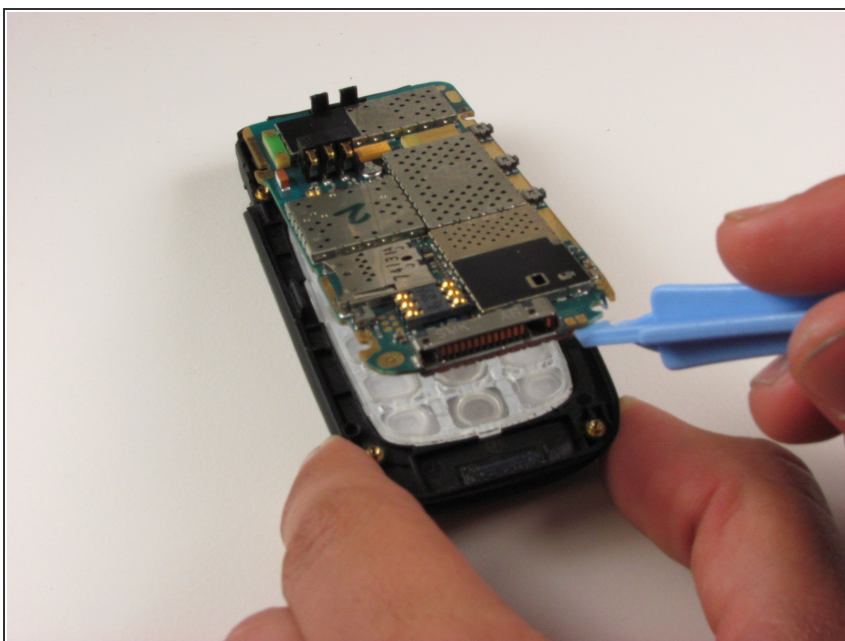

- Close the phone and place on flat surface
 - Using a plastic opening tool or your finger, lift up the motherboard from the bottom casing
- ⚠ Be careful when pulling up the board, there is still a ribbon cable on the back of the board

Step 9

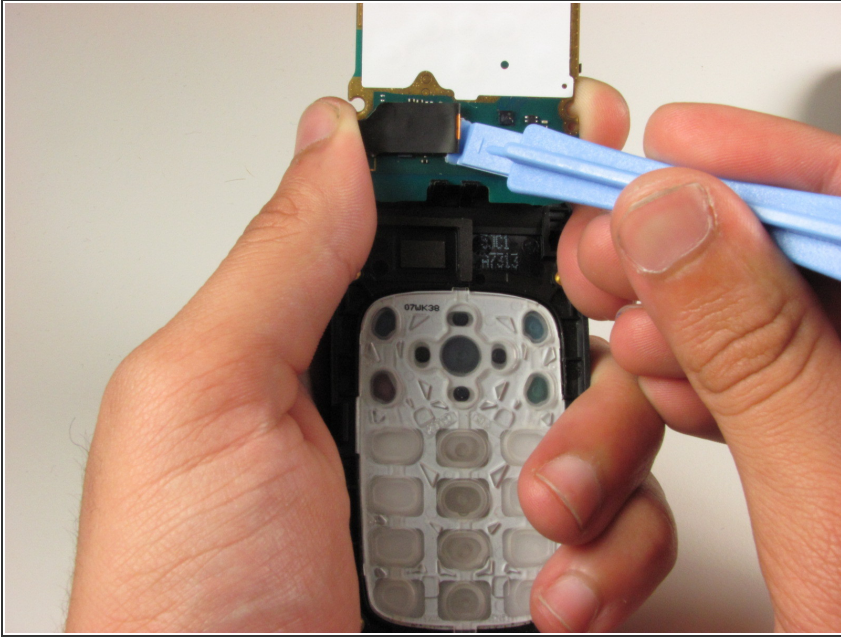

- When the board is pulled up, look for the ribbon cable holding the board to the rest of the phone
- Using a plastic opening tool, slowly detach the ribbon cable connection and pull the board away from the frame

Step 10 — Keypad



- Once the motherboard is moved out of the way, pry out the keypad with a plastic opening tool

To reassemble your device, follow these instructions in reverse order.